

**Description:**

PG-Therm is a Mica (Phlogopite) based gasket material, a small amount of high quality silicone binder is used to form the sheet. Also available as filler for Spiral Wound Gaskets.

**Application:**

PG-Therm is a High Temperature gasket material designed for exhaust systems, heat exchangers and other high temperature applications where there is moderate pressure involved.

**Availability:****Thickness**

0.4mm to 6.0mm

1.0mm to 3.0mm (with Tang)

**Sheet Size**

1200mm X 1000mm

1000mm X 1000mm (with Tang)

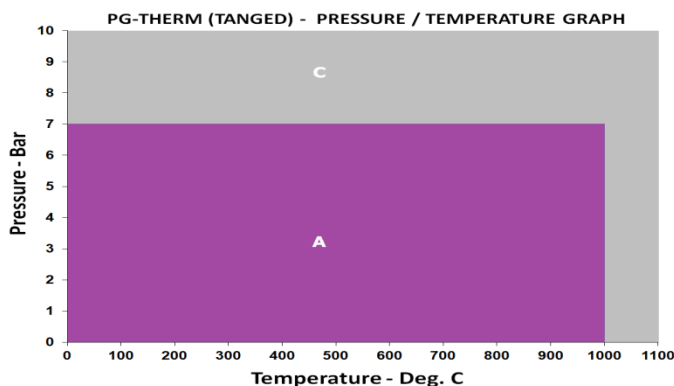
**Colour:**

Gold

# PG-Therm Datasheet

**Typical Physical Properties:**

		PG-Therm	PG-Therm Tanged
Density		2.0 g/cc	1.9 g/cc
Tensile Strength	ASTM F152	23 MPa	N/A
Compression	ASTM F36 J	20%	12%
Recovery	ASTM F36 J	42%	60%
Residual Stress	BS7531	33 MPa	35 MPa
Residual Stress	DIN 52913	40 MPa	45 MPa
Ignition Loss	DIN 52911	5%	N/A

**Service:**

A = Suitable subject to chemical compatibility.

B = Please contact our Technical Team.

C = Not Suitable

As the company's products are used in multiple applications and as the company has no control over the method of their use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise. Any technical cooperation is given for customer assistance only and without liability on the part of the company.

